


MOVIEBLOC M3 SERIES
SYSTEM MANUAL-MECHANIC OPERATION
LOAD PER SHELF: 100 kg
MAXIMUM LOAD OF THE CUPBOARD: 4430 kg
MAXIMUM LOAD ON CENTRAL WHEEL: 1081 kg
FORCE NEEDED TO OPERATE CUPBOARD: 4 kg
BASE LOCK
X: SIDE CLADDING

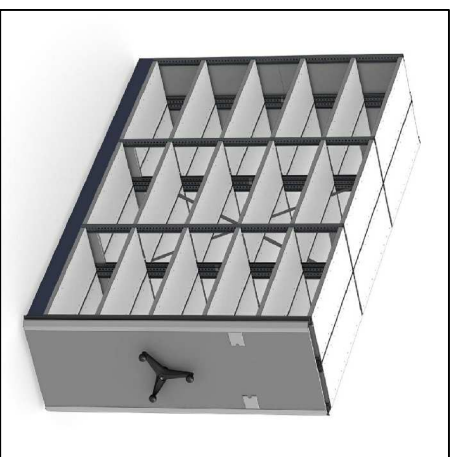

VÝKRES	VYHOT.	ZKONT.	DATUM	INDEX	
<div>Mesto ěeský BrodZákazník:</div>					
MECALUX					
Datekum	29/08/2023	Revize ě.	1775716-1	01	POTVRZENÍ ZÁKAŽNÍKA: SYSTEM A ROZNIRY VE VÝKRESU
Vyhotovil	M.Tokarz-Družba	Výkres ě.	1	1	
Zkontroloval		Připustné zatížení v kg	indicated		
Měřtko	1 : 75				
Tento dokument je majetkem společnosti MECALUX, S.A., jeho úplná či částečná reprodukce nebo jeho předání třetí osobě je zakázáno					

Všechny uvedené rozmíry jsou jmenovité a mohou se lišit v závislosti na typu použitých profilů a na výrobních a montážních tolerancích povolených v příslušných normách.

User confirmed the loads imposed by the rack and their impact on the floor
User confirmed the distribution of racks in respect to the dilatation network
User confirmed the layout of racks and its compliance with the industrial safety and fire regulations
User confirmed the room measurements and the racking installation dimensions
THE DESIGN AND THE QUOTATION ARE PROVISIONAL AND THEY CAN BE MODIFIED BY MECCALUX IN FUNCTION OF THE DEFINITIVE CALCULATION.