

svítidla AMPERA MINI / 24 LED / 350 mA / 5145 / CW / 27 W

Project : Český Brod - přechod s ostrůvkem

File : C:\Users\User\Desktop\PECHOD~1.LPF

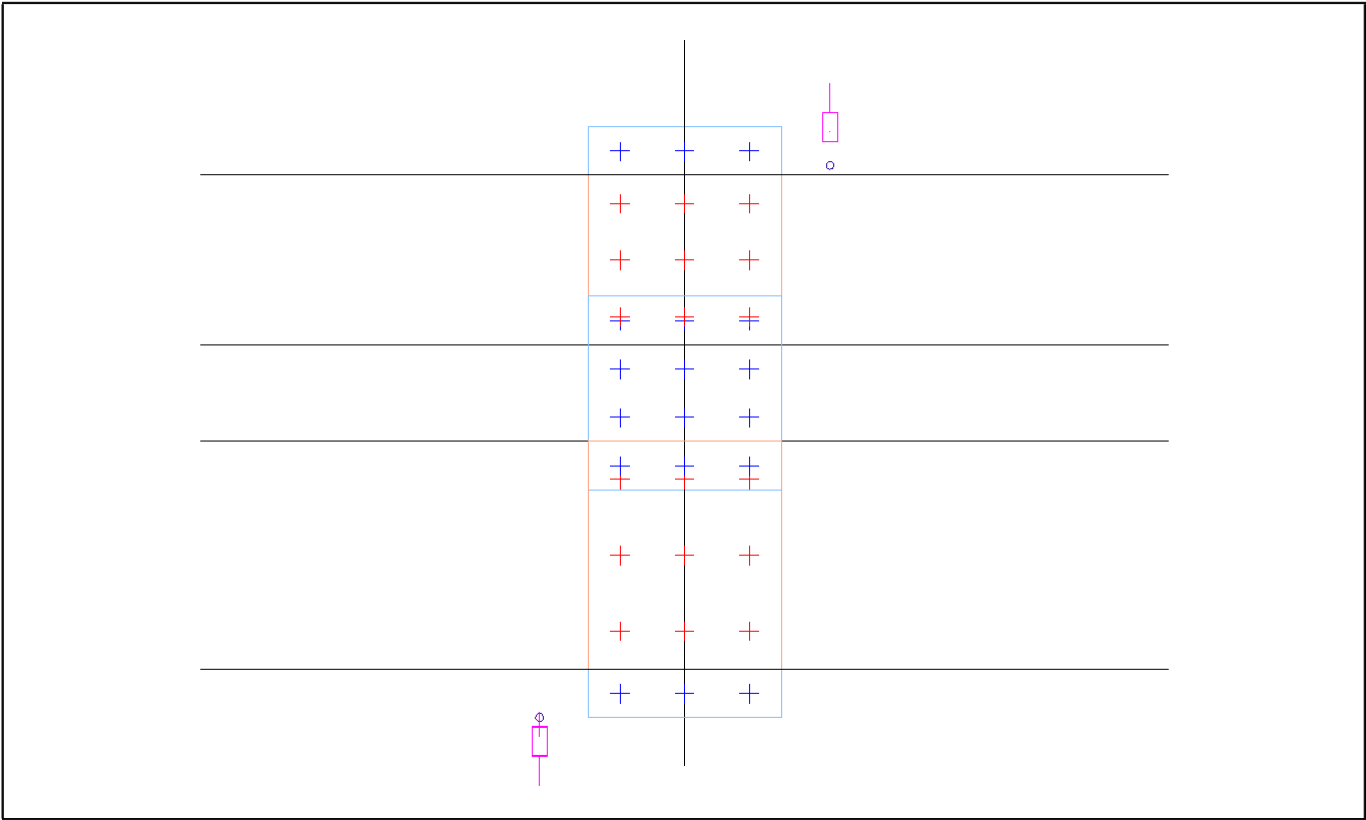
## Summary

### Grid summary

Average type : Arithmetic (A) or Weighted (W)

<b>Zakladni prostor A z prava (1)</b>	<b>Min</b>	<b>Max</b>	<b>Ave (A)</b>	<b>Min/Max</b>	<b>Min/Ave</b>
Illuminance (lux)	11,4	24,5	15,1	46,6	75,7
<b>Doplnkovy prostor B1 z prava (2)</b>	<b>Min</b>	<b>Max</b>	<b>Ave (A)</b>	<b>Min/Max</b>	<b>Min/Ave</b>
Illuminance (lux)	10,8	16,5	13,0	65,7	83,2
<b>Doplnkovy prostor prodlouzeny B2 z prava (3)</b>	<b>Min</b>	<b>Max</b>	<b>Ave (A)</b>	<b>Min/Max</b>	<b>Min/Ave</b>
Illuminance (lux)	5,4	25,6	13,5	21,1	40,0
<b>Zakladni prostor A z leva (4)</b>	<b>Min</b>	<b>Max</b>	<b>Ave (A)</b>	<b>Min/Max</b>	<b>Min/Ave</b>
Illuminance (lux)	10,4	21,8	15,4	47,9	67,9
<b>Doplnkovy prostor B1 z leva (5)</b>	<b>Min</b>	<b>Max</b>	<b>Ave (A)</b>	<b>Min/Max</b>	<b>Min/Ave</b>
Illuminance (lux)	11,1	16,7	13,1	66,7	84,8
<b>Doplnkovy prostor prodlouzeny B2 z leva (6)</b>	<b>Min</b>	<b>Max</b>	<b>Ave (A)</b>	<b>Min/Max</b>	<b>Min/Ave</b>
Illuminance (lux)	7,3	33,9	17,8	21,5	41,1

Current view Configuration (1)



**Grid results**

Average type : Arithmetic (A) or Weighted (W)

**Zakladni prostor A z prava (1) : Illuminance [lux]**

Min : 11,4 lux

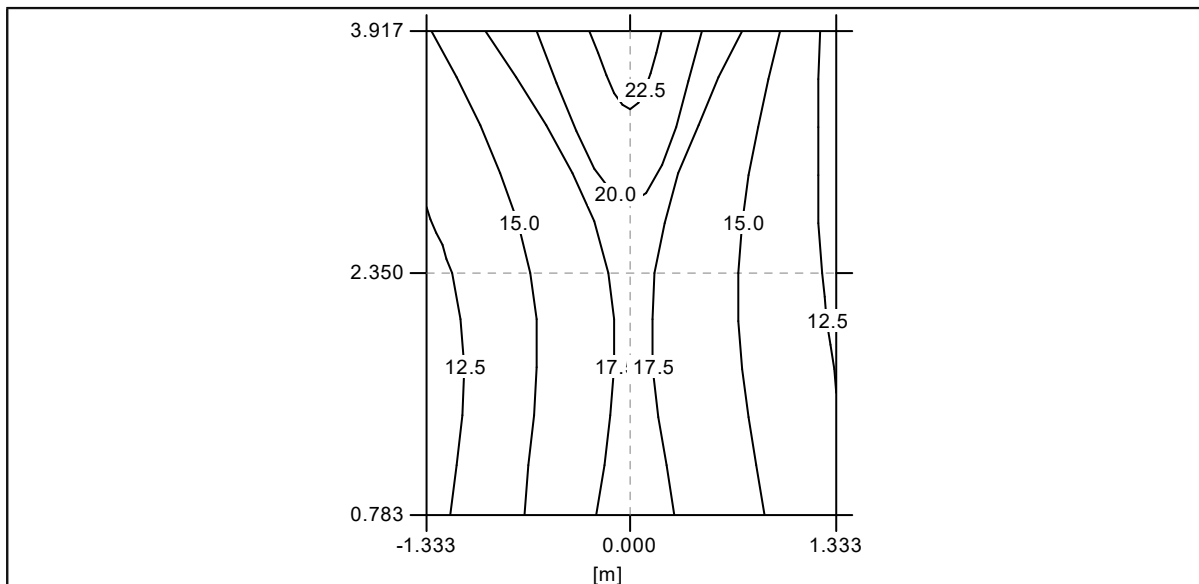
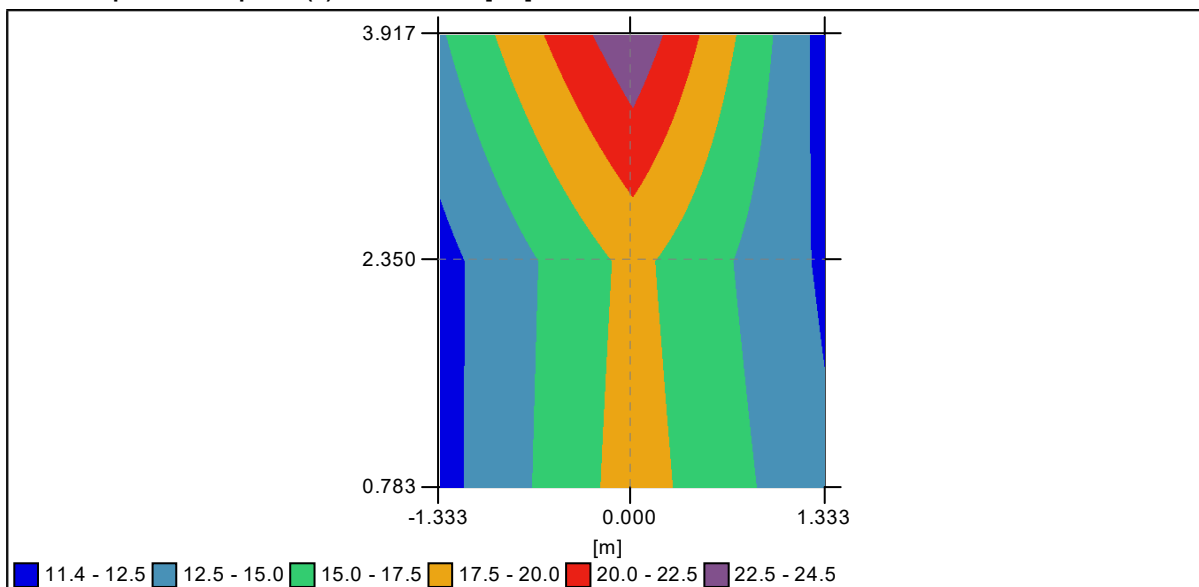
Ave (A) 15,1 lux

Max : 24,5 lux

Uo : 75,7 %

Ug : 46,6 %

3,917	14,7	24,5	11,4
2,350	11,7	18,2	12,1
0,783	11,6	18,7	13,0
Y/X	-1,333	0,000	1,333

**Zakladni prostor A z prava (1) : Illuminance [lux]****Zakladni prostor A z prava (1) : Illuminance [lux]**

**Doplňkový prostor B1 z prava (2) : Illuminance [lux]**

Min : 10,8 lux

Ave (A) 13,0 lux

Max : 16,5 lux

Uo : 83,2 %

Ug : 65,7 %

-0,500	10,8	16,5	11,8
Y/X	-1,333	0,000	1,333

**Doplnkový prostor prodloužený B2 z prava (3) : Illuminance [lux]**

Min : 5,4 lux

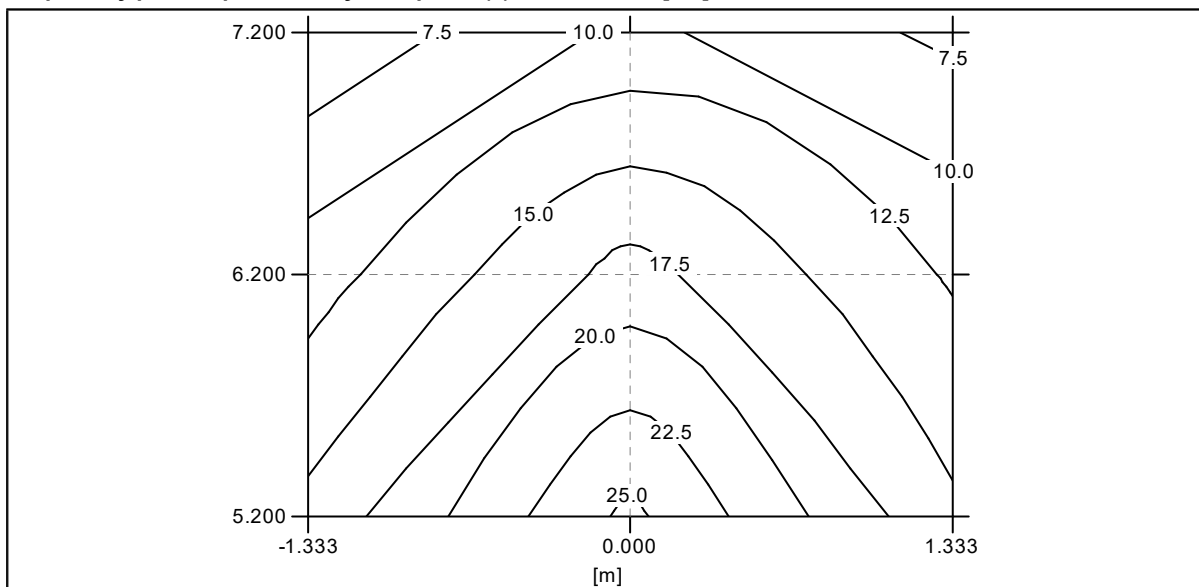
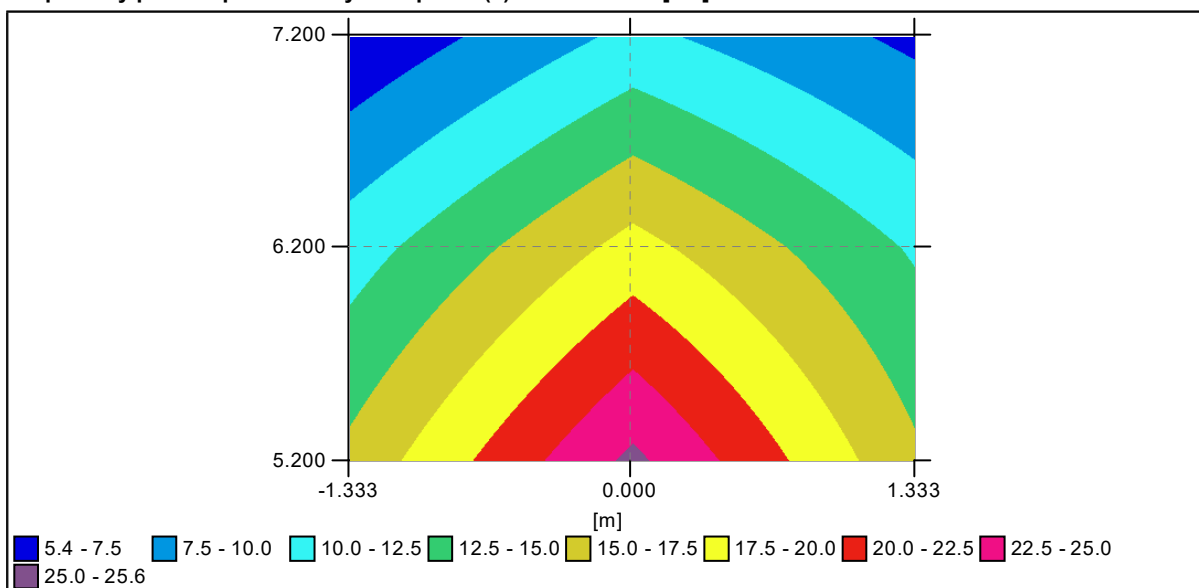
Ave (A) 13,5 lux

Max : 25,6 lux

Uo : 40,0 %

Ug : 21,1 %

7,200	5,4	10,6	6,9
6,200	11,3	18,4	12,2
5,200	15,7	25,6	15,5
Y/X	-1,333	0,000	1,333

**Doplnkový prostor prodloužený B2 z prava (3) : Illuminance [lux]****Doplnkový prostor prodloužený B2 z prava (3) : Illuminance [lux]**

**Zakladni prostor A z leva (4) : Illuminance [lux]**

Min : 10,4 lux

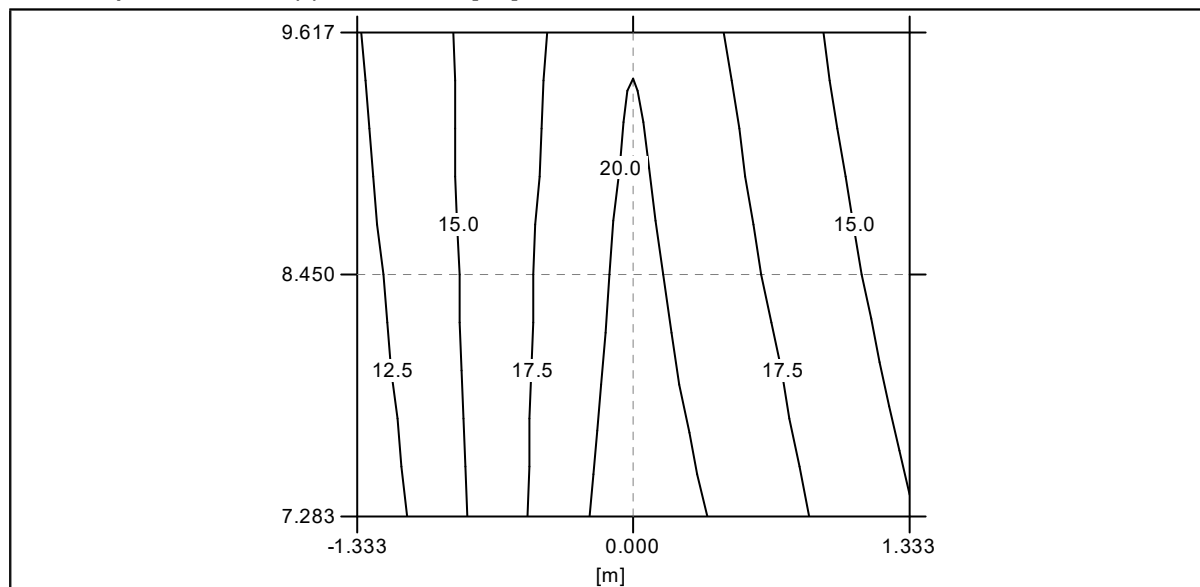
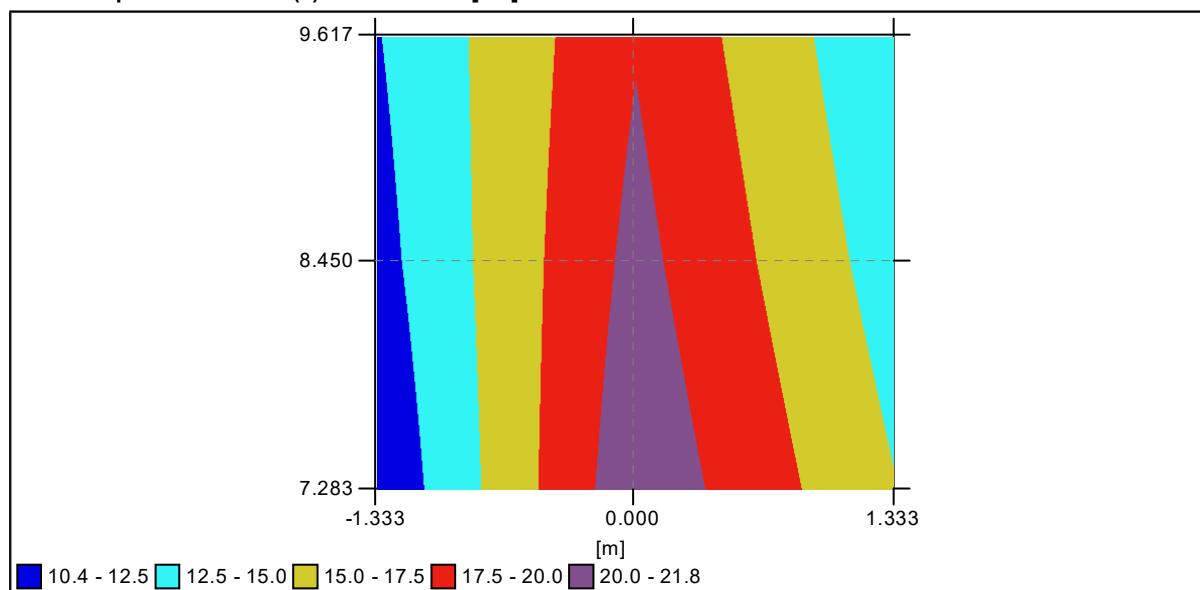
Ave (A) 15,4 lux

Max : 21,8 lux

Uo : 67,9 %

Ug : 47,9 %

9,617	12,4	19,8	12,8
8,450	11,6	20,7	13,8
7,283	10,4	21,8	15,1
Y/X	-1,333	0,000	1,333

**Zakladni prostor A z leva (4) : Illuminance [lux]****Zakladni prostor A z leva (4) : Illuminance [lux]**

**Doplnkový prostor B1 z leva (5) : Illuminance [lux]**

Min : 11,1 lux

Ave (A) 13,1 lux

Max : 16,7 lux

Uo : 84,8 %

Ug : 66,7 %

10,700	11,6	16,7	11,1
Y/X	-1,333	0,000	1,333

**Doplnkový prostor prodloužený B2 z leva (6) : Illuminance [lux]**

Min : 7,3 lux

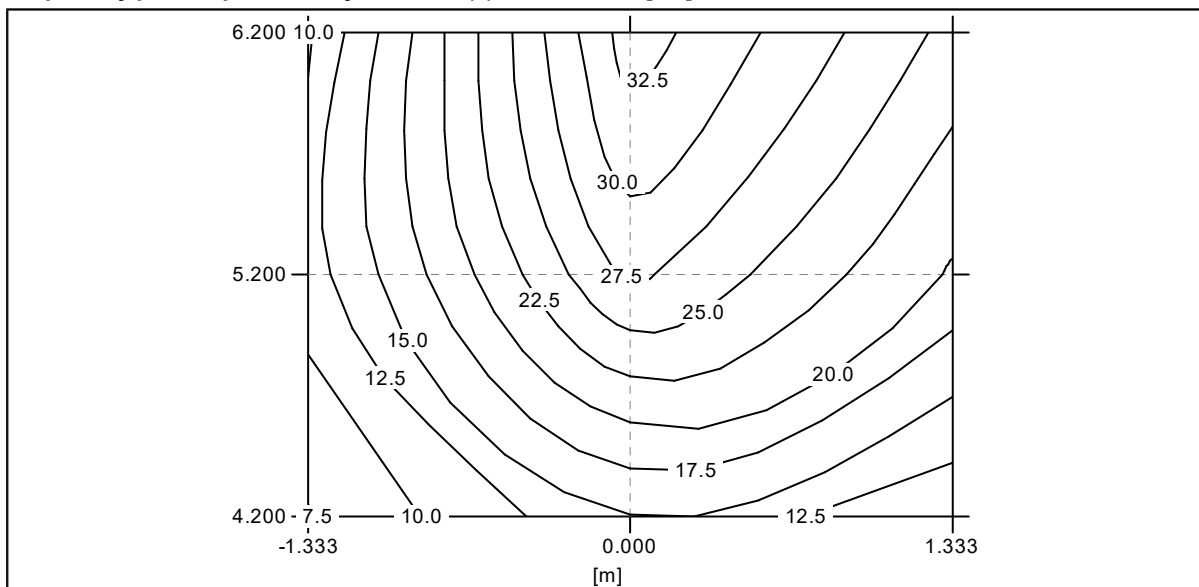
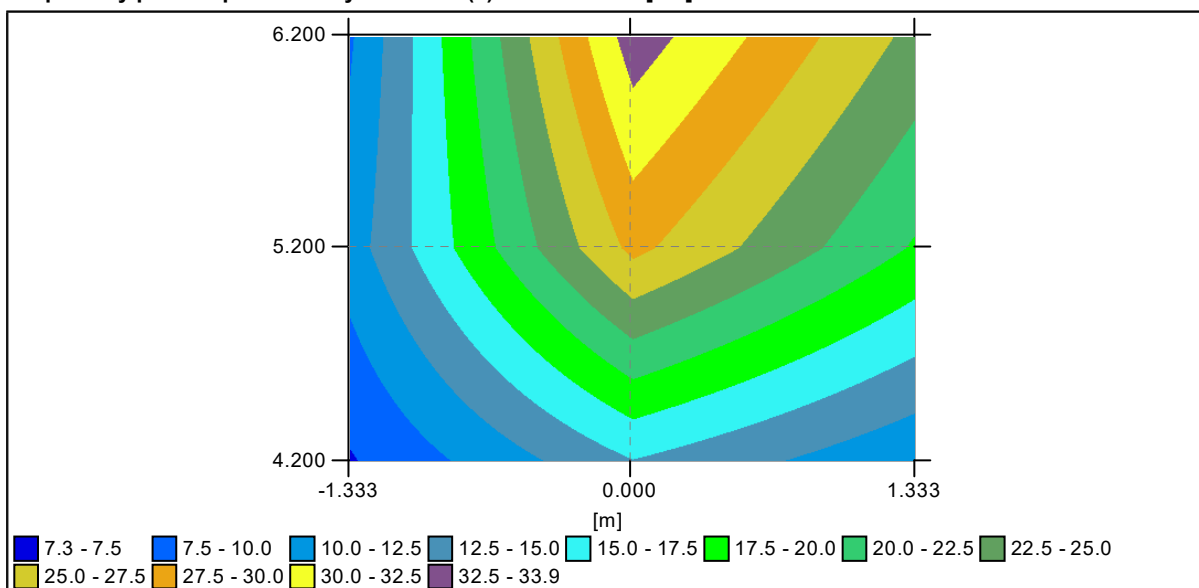
Ave (A) 17,8 lux

Max : 33,9 lux

Uo : 41,1 %

Ug : 21,5 %

6,200	9,7	33,9	24,3
5,200	11,3	28,2	19,7
4,200	7,3	14,9	10,4
Y/X	-1,333	0,000	1,333

**Doplnkový prostor prodloužený B2 z leva (6) : Illuminance [lux]****Doplnkový prostor prodloužený B2 z leva (6) : Illuminance [lux]**



**General information****Configuration details**

## • Configuration (1)

Activated ☒

Matrix	Description	Flux	MF	Luminaire
356472	C:\Program Files (x86)\Schreder\Lighting\Matrices\356472.mat	4,0	0,80	No Picture

**Group details**

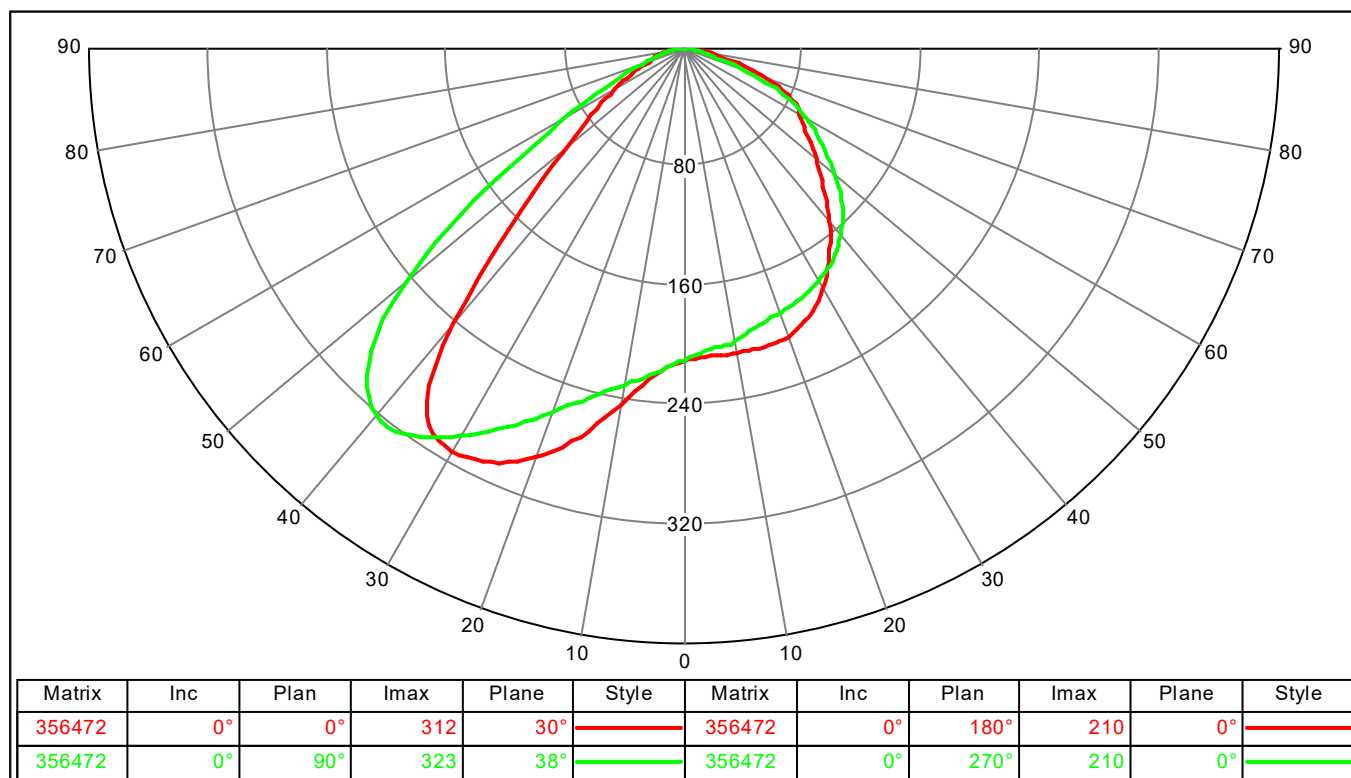
Single								
	N°	Start			Luminaire			
		X	Y	H	Matrix	Az	Inc	Rot
✓	1	-3,000	-1,400	6,000	356472	0,0	5,0	0,0
✓	2	3,000	11,100	6,000	356472	180,0	0,0	0,0

## Photometric documents

356472

C:\Program Files (x86)\Schreder\Lighting\Matrices\356472.mat

## Polar / Cartesian diagram



## Utilization curve

